



Bs-Temperature

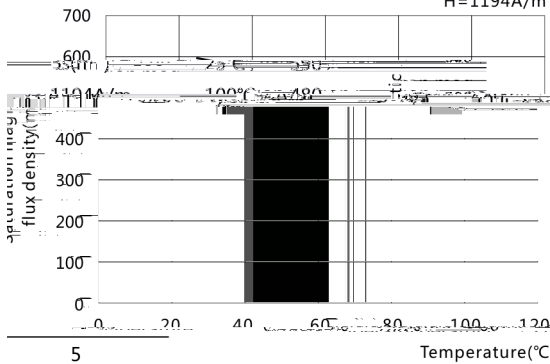

Initial permeability	μ_i	25°C	1600±25%	
Remanence	B_r (mT)	25°C	150	
		100°C	250	
Coercivity	H_c (A/m)	25°C	35	
		100°C	30	
Core loss	P_{cv} (kW/m ³)	25°C	280	
		25kHz-200mT	100°C	470
Curie temperature	T_c (°C)		>280	

μ_i -Temperature

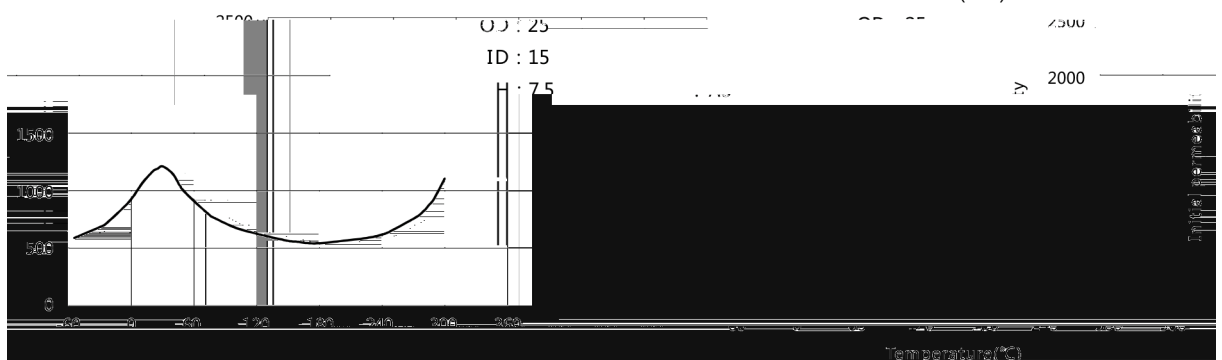


Electrical resistivity	ρ (Ω·m)
Density	d (kg/m ³)
Test core : Toroid(mm)	


B-H




μ_i -Frequency

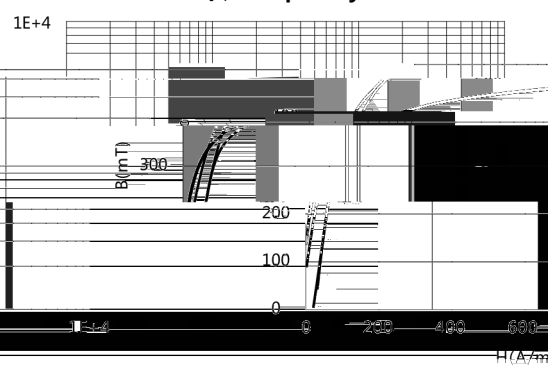


Pcv-Temperature

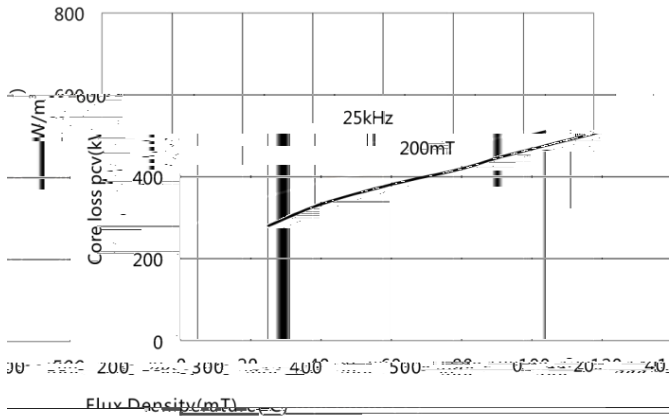

μ_a -Bm

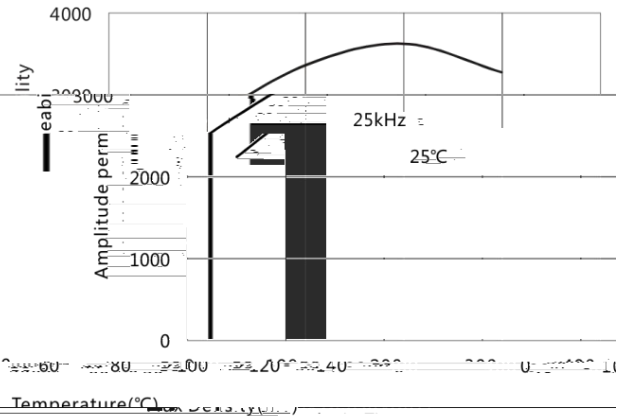

Pcv-Bm

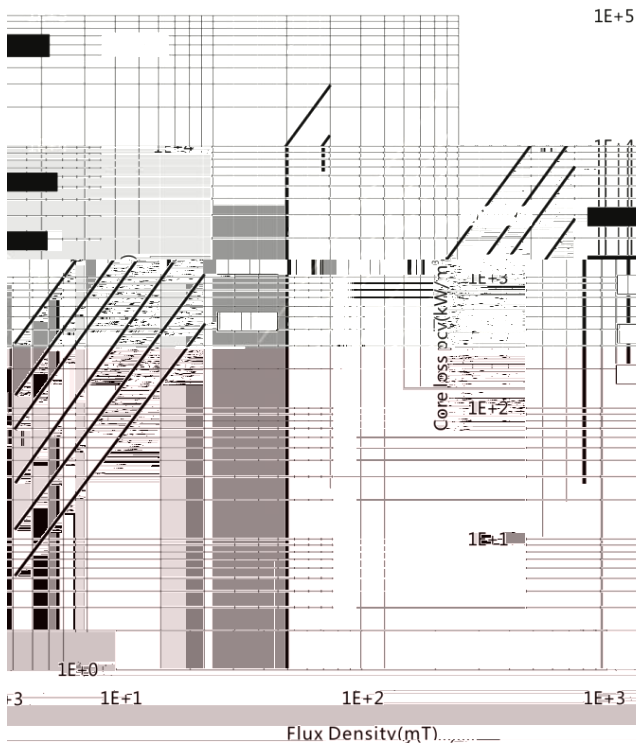

Pcv-Bm

